

Solenoid cutter

P/N SFS-SOL

DT-SFS-SOLE Rev 1.1
Effective: July 2019

FEATURES


- For using with single SFS FM-200 cylinder

DESCRIPTION

The solenoid cutter is used to actuate the single SFS FM-200 cylinder.

It is activated via electric signal that is sent by the control panel (supplied separately) upon fire detection.

The solenoid cutter is fitted with PUSH button that is and should only be used for emergency manual activation should the electronics fail

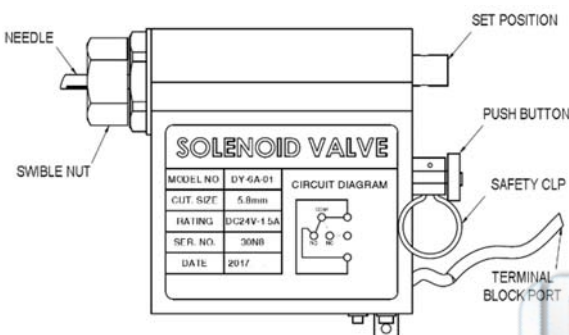

(OEM part: DSV-6A)

TECHNICAL INFORMATION

Voltage : 24Vdc
Current : 1.5A

ORDERING INFORMATION

The part number for ordering the Solenoid cutter as below:

| Part number | Description |
|-------------|--|
| SFS-SOL | Solenoid cutter for single FM-200 cylinder |

The SFS FM-200 system are designed and manufactured under license from S-TEC SYSTEM (Trademark AnyFire(HFC-227ea)TM). Address 82, Sangdeok-ro, Jiksan-eup, Seobuk-Gu, Chaonan-si, Chungnam 31038, KOREA. The calculation software use AnyFire(HFC-227ea)TM logo.

This literature is provided for informational purposes only. S-TECVINA Ltd., assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact S-TECVINA Ltd.,

FM-200 is a registered trademark of The Chemours Company FC, LLC. 1007 Market Street Wilmington, DE19899 United States of America (USA)

S-TECVINA Ltd.,
Dong Van IV IZ, Ha Nam, Vietnam
Phone: (+84) 0226 2460 114
www.stecvina.com