






Fire Detection & Monitoring for Floating Roof Tanks

- SCADA connections provide continuous monitoring to protect plant wide assets
- A single DTS unit supports up to 16 km of linear coverage

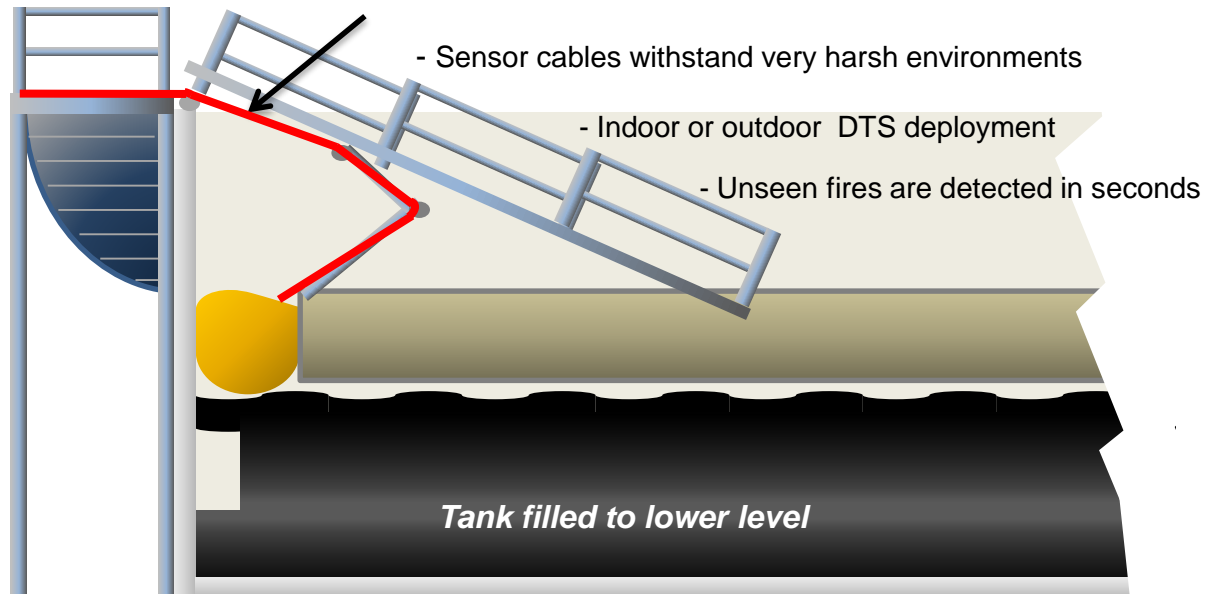


- HW, SW, and Sensor Installations are simple & inexpensive
- Systems are virtually maintenance free
- Fiber optic sensors are immune to lightning or EMI
- Systems are ATEX Zone certified for explosive environments

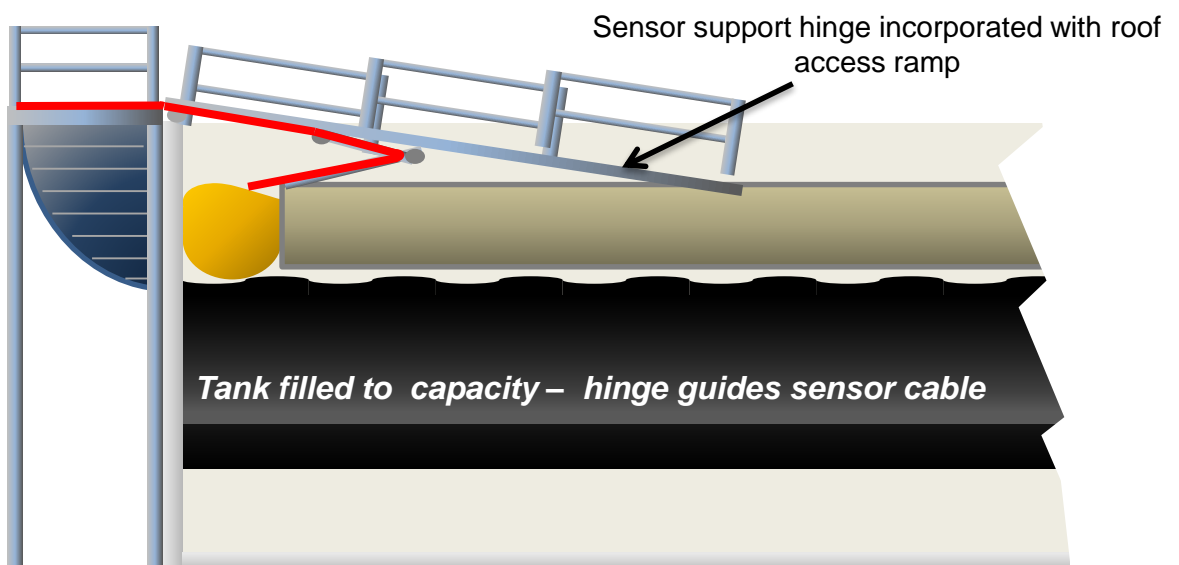

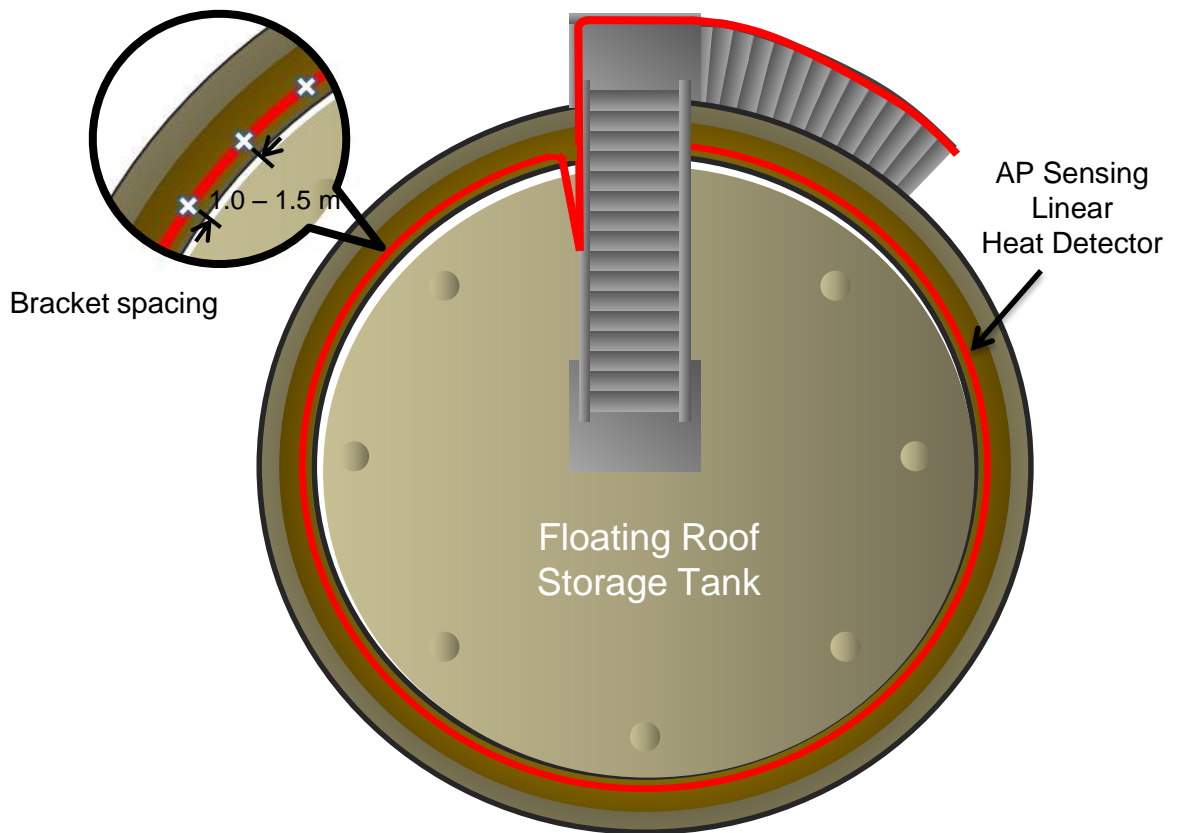

Top view – bracket spacing of sensor cable

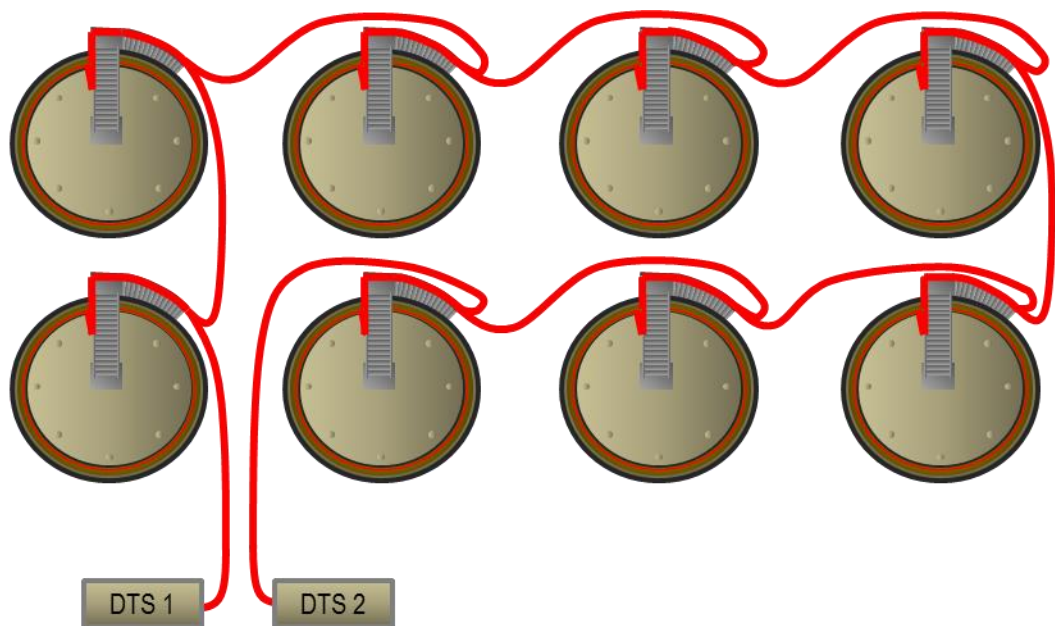

Monitoring tanks with two DTS instruments offers full redundancy