

SensoMAG MRB50 Manual Release Call Point

EN54-11
EN 12094-3

Description

SensoMAG MRB50 is a manual call point for emergency start, or forced activation of the extinguishing process on the protected area.

The call point is designed to work with extinguishing fire control panels and it is suitable for surface indoor mounting. The pressing of the resettable (flexible) operating element provides immediate activation of the extinguishing process on the protected area.


SensoMAG MRB50 is equipped with a transparent protective cover which helps for minimizing the unwanted activation of the call point.



DoP No: 115

Technical and Environmental Specifications

Operating voltage	9 ÷ 30 VDC
Switch	NO type (normally open)
Installation wires	0.4mm ² ÷ 2.0mm ²
Operation temperature	-10°C ÷ +60°C
Relative humidity	≤93% @ +40°C
Operating element	Resettable; Type B
Material (plastic), color	ABS, yellow
Degree of protection	IP40
Dimensions (without protective cover)	90x57x90mm
Dimensions (with protective cover)	94x60x92mm
Weight	169g



Packing Information

- **Packing box** - Kit of 1 unit SensoMAG MRB50, 1 unit special tool, 1 protective cover; dimensions 96x96x65 mm
- **Carton box** - 48 kits of SensoMAG MRB50, dimensions 486x295x196 mm

Compatible Product Range


- **IVY** - Extinguishing Conventional Fire Alarm Panel

Contact Information:

SensoMAG MRB50 Manual Release Call Point

EN54-11
EN 12094-3

● Connection Diagram

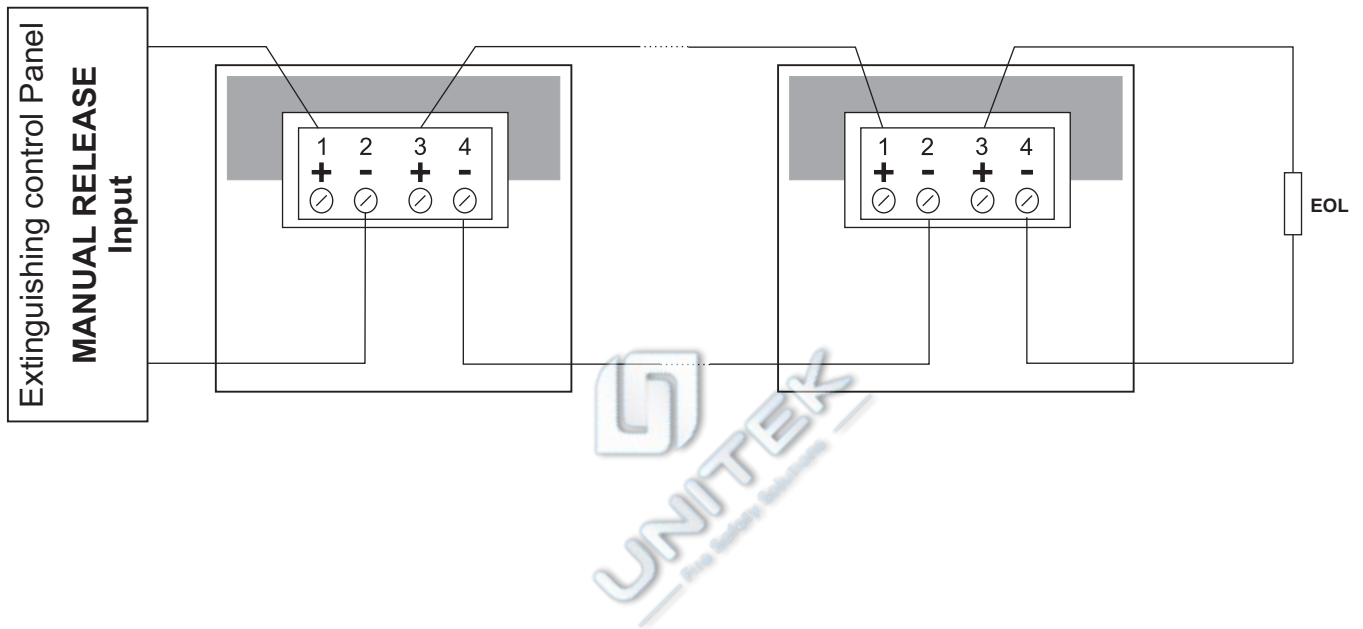

● Contact Information: